


4

5

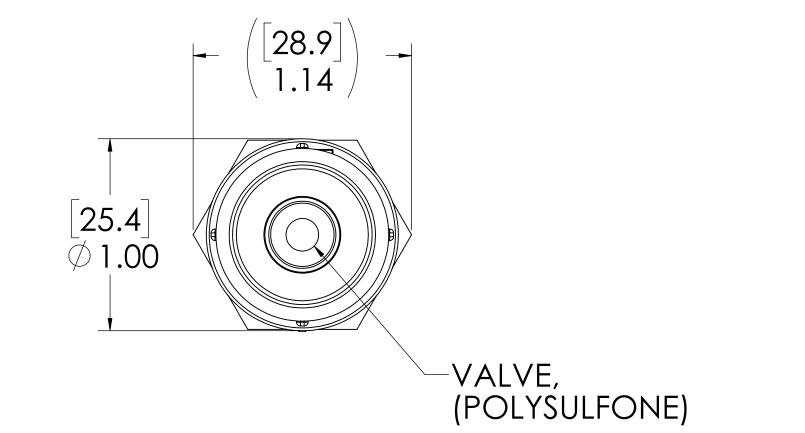

6

6

## NOTES:

8

D

С

8

7

- 1. MATERIAL: POLYSULFONE
- 2. COLOR: WHITE
- 3. O-RING MATERIAL:EPDM
- 4. O-RINGS LUBRICATED WITH FOOD GRADE SILICONE OIL, 350 CST.


7


			3		2	1			
REVISIONS									
	SHEET	ZONE	REV.	ECO	DESCRIPTION	DATE	APPROVED		
	1	A-8	А		ADDED O-RING LUBRICATION NOTE	8/20/2014	HRC		
	1	A-8	А	50108	INITIAL RELEASE	9/9/2014	HRC		
	1	ALL	В	50257	O-RING AND DWG FORMAT UPDATE	6/28/2018	HRC		

Е

D

С

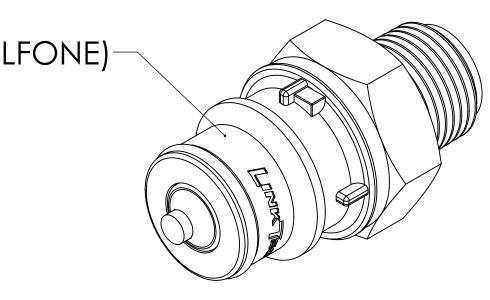

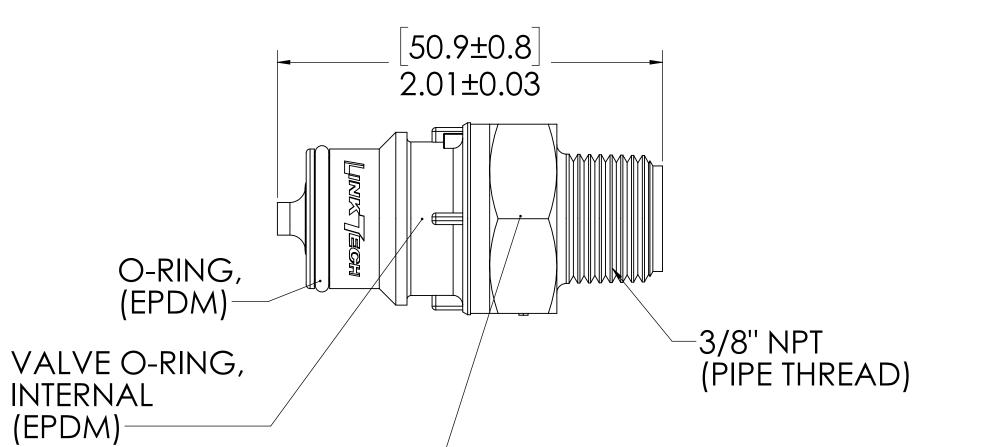

## VALVE SPRING, INTERNAL (STAINLESS STEEL)-

4

## FOR REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	LINK TECH		
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	HRC	9/4/13			
FRACTIONAL±1/32 ANGULAR: MACH±0.5 BEND ±2	CHECKED	HRC	9/4/13	PART NO: 60PSV-PE1-06		
ONE PLACE DECIMAL ±0.1 TWO PLACE DECIMAL ±0.01	ENG APPR.	HRC	6/28/18	001 3 V -1 L I -00		
THREE PLACE DECIMAL ±0.005 TWO PLACE DUAL (mm) [±0.12]	MFG APPR.	BDB	6/28/18	DESCRIPTION:		
PROPRIETARY AND CONFIDENTIAL	PRODUCTION	LS	6/28/18			
	COMMENTS:			Male, Valved, 3/8" MNPT, Polysulfone		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF				SIZE DWG. NO. REV		
LINKTECH LLC. ANY REPRODUCTION OR DISCLOSURE IN PART OR AS A				<b>C</b> 60PS600061 B		
WHOLE WITHOUT THE WRITTEN						
PERMISSION OF LINKTECH LLC IS STRICKLY PROHIBITED.				SCALE: NTS WEIGHT: SHEET 1 OF 1		
	2			1		

3